



A3L:160TT.XXH

VOLTAGE RATINGS

Part Number	V_{RRM}, V_R (V) Max. rep. peak reverse voltage		V_{RSM}, V_R (V) Max. non-rep. peak reverse voltage
	$T_J = 0$ to 125°C	$T_J = -40$ to 0°C	$T_J = 25$ to 125°C
	A3L:160TT.02H	200	200
A3L:160TT.04H	400	400	500
A3L:160TT.06H	600	600	700
A3L:160TT.08H	800	800	900
A3L:160TT.10H	1000	1000	1100
A3L:160TT.12H	1200	1200	1300
A3L:160TT.14H	1400	1330	1500
A3L:160TT.16H	1600	1520	1700

MAXIMUM ALLOWABLE RATINGS

PARAMETER	VALUE	UNITS	NOTES
T_J Junction Temperature	-40 to 125	$^\circ\text{C}$	-
T_{stg} Storage Temperature	-40 to 150	$^\circ\text{C}$	-
$I_{F(AV)}$ Max. Av. current @ Max. T_C	160	A	180° half sine wave
	85	$^\circ\text{C}$	
$I_{F(RMS)}$ Nom. RMS current	355	A	-
I_{FSM} Max. Peak non-rep. surge current	4.38	kA	50 Hz half cycle sine wave Initial $T_J = 125^\circ\text{C}$, rated V_{RRM} applied after surge.
	4.77		60 Hz half cycle sine wave
	4.99		50 Hz half cycle sine wave Initial $T_J = 125^\circ\text{C}$, no voltage applied after surge.
	5.44		60 Hz half cycle sine wave
I^2t Max. I^2t capability	99	kA^2s	$t = 10\text{ms}$ Initial $T_J = 125^\circ\text{C}$, rated V_{RRM} applied after surge.
	108		$t = 8.3\text{ms}$
	113		$t = 10\text{ms}$ Initial $T_J = 125^\circ\text{C}$, no voltage applied after surge.
	123		$t = 8.3\text{ms}$
$I^2t^{1/2}$ Max. $I^2t^{1/2}$ capability	1350	$\text{kA}^2\text{s}^{1/2}$	Initial $T_J = 125^\circ\text{C}$, no voltage applied after surge. I^2t for time $t_x = I^2t^{1/2} * t_x^{1/2}$. ($0.1 < t_x < 10\text{ms}$).
di/dt Max. Non-repetitive rate-of-rise current	500	A/ μs	$T_J = 125^\circ\text{C}$, $V_D = V_{DRM}$, $I_{TM} = 1600\text{A}$. Gate pulse: 20V, 20 Ω , 10 μs , 0.5 μs rise time, Max. repetitive di/dt is approximately 40% of non-repetitive value.
P_{GM} Max. Peak gate power	10	W	$t_p < 5\text{ms}$
$P_{G(AV)}$ Max. Av. gate power	3	W	-
$+I_{GM}$ Max. Peak gate current	150	mA	$t_p < 5\text{ms}$
$-V_{GM}$ Max. Peak negative gate voltage	2	V	-
F Mounting Force	3(5)	N.m	Upper connectors(Heatsink)



A3L:160TT.XXH

CHARACTERISTICS

PARAMETER	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
V_{TM} peak on-state voltage	---	---	1.58	V	Initial $T_J = 25^\circ\text{C}$, 50-60Hz half sine, $I_{peak} = 502\text{A}$.
$V_{T(TO)}$ Threshold voltage	---	---	0.88	V	$T_J = 125^\circ\text{C}$ Av. power = $V_{T(TO)} * I_{T(AV)} + r_T * [I_{T(RMS)}]^2$, 180 Half Sine.
r_T Slope resistance	---	---	1.45	m Ω	Use low values for $I_{TM} < \pi$ rated $I_{T(AV)}$
I_L Latching current	---	---	300	mA	$T_C = 125^\circ\text{C}$, 12V anode. Gate pulse: 10V, 20 Ω , 100 μs .
I_H Holding current	---	---	500	mA	$T_C = 25^\circ\text{C}$, 12V anode. Initial $I_T = 15\text{A}$.
t_d Delay time	---	0.7	1.5	μs	$T_C = 25^\circ\text{C}$, $V_D = V_{DRM}$, 50A resistive load. Gate pulse: 10V, 20 Ω , 10 μs , 1 μs rise time.
t_q Turn-off time	---	125	200	μs	$T_J = 125^\circ\text{C}$, $I_{TM} = 500\text{A}$, $di/dt = 25\text{A}/\mu\text{s}$, $V_R = 50\text{V}$. $dv/dt = 20\text{V}/\mu\text{s}$ lin. to rated V_{DRM} . Gate: 0V, 100 Ω .
dv/dt Critical rate-of-rise of off-state voltage	80	140	---	V/ μs	$T_J = 125^\circ\text{C}$. Exp. to 100% or lin. Higher dv/dt values available. To 80% V_{DRM} , gate open.
	---	---	1000		$T_J = 125^\circ\text{C}$, Exp. To 67% V_{DRM} , gate open.
I_{RM} , I_{DM} Peak reverse and off-state current	---	10	50	mA	$T_J = 125^\circ\text{C}$, Rated V_{RRM} and V_{DRM} , gate open.
I_{GT} DC gate current to trigger	---	---	300	mA	$T_C = -40^\circ\text{C}$
	50	80	150		$T_C = 25^\circ\text{C}$
V_{GT} DC gate voltage to trigger	4	---	---	V	$T_C = -40^\circ\text{C}$ +12V anode-to-cathode. For recommended gate drive see "Gate Characteristics" figure.
	2	---	2.5		$T_C = 25^\circ\text{C}$
V_{GD} DC gate voltage not to trigger	---	---	0.3	V	$T_C = 25^\circ\text{C}$, Max. Value which will not trigger with rated V_{DRM} anode.
R_{thJC} Thermal resistance, junction-to-case	---	---	0.08	$^\circ\text{C}/\text{W}$	DC operation, single side cooled.
	---	---	0.086	$^\circ\text{C}/\text{W}$	180 sine wave, single side cooled.
	---	---	0.091	$^\circ\text{C}/\text{W}$	120 rectangular wave, single side cooled.
R_{thCS} Thermal resistance, case-to-sink	---	---	0.05	$^\circ\text{C}/\text{W}$	Mtg. Surface smooth, flat and greased. Single side cooled.
wt Weight	---	200(7.27)	---	g(oz.)	---

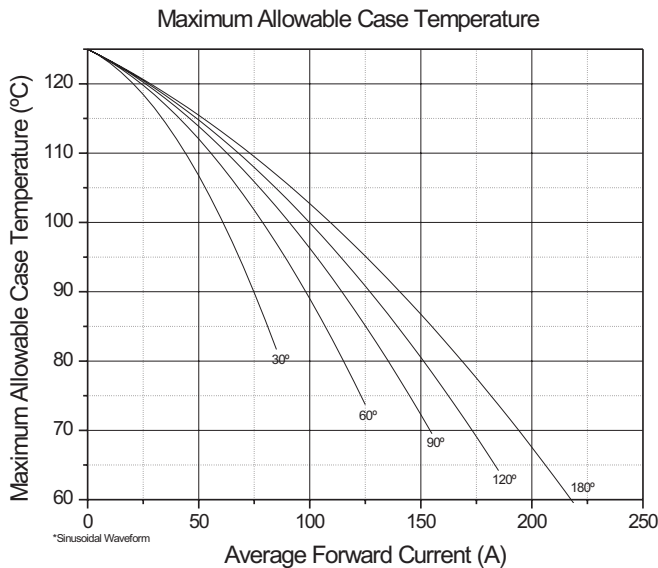


Fig. 1 - Current Ratings Characteristics

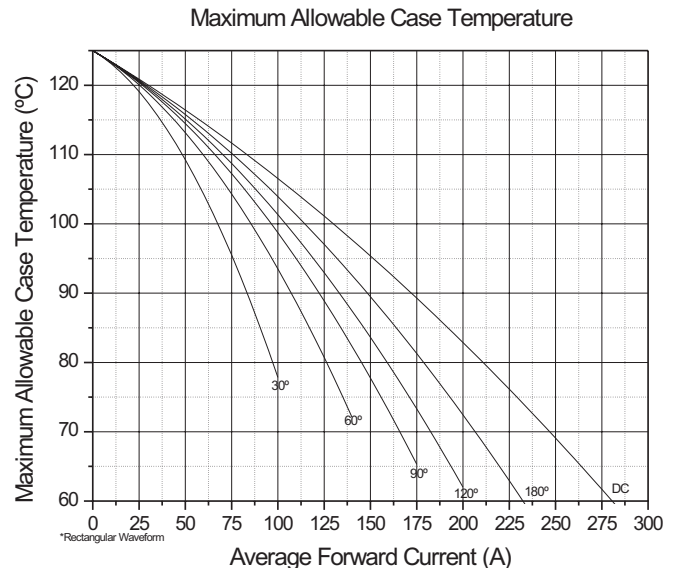


Fig. 2 - Current Ratings Characteristics



A3L:160TT.XXH

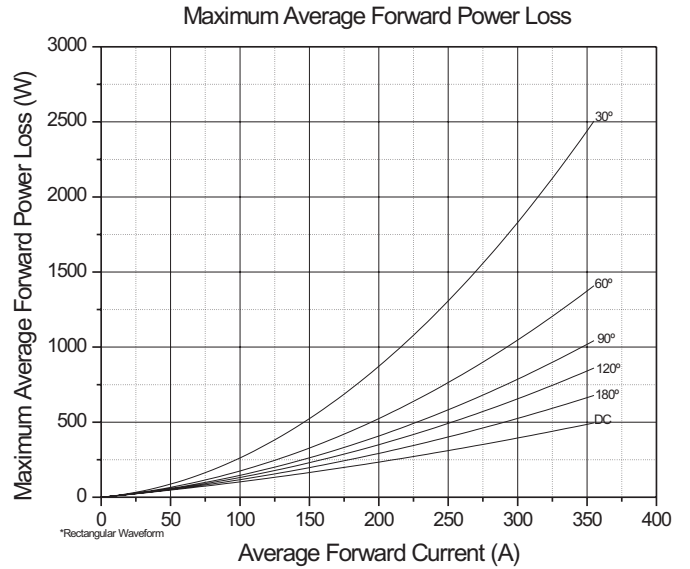
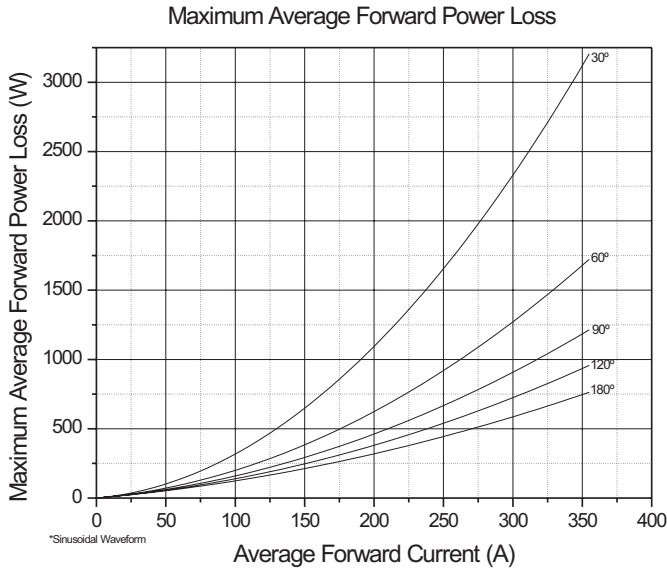


Fig.3 -Forward Power Loss Characteristics

Fig. 4 - Forward Power Loss Characteristics


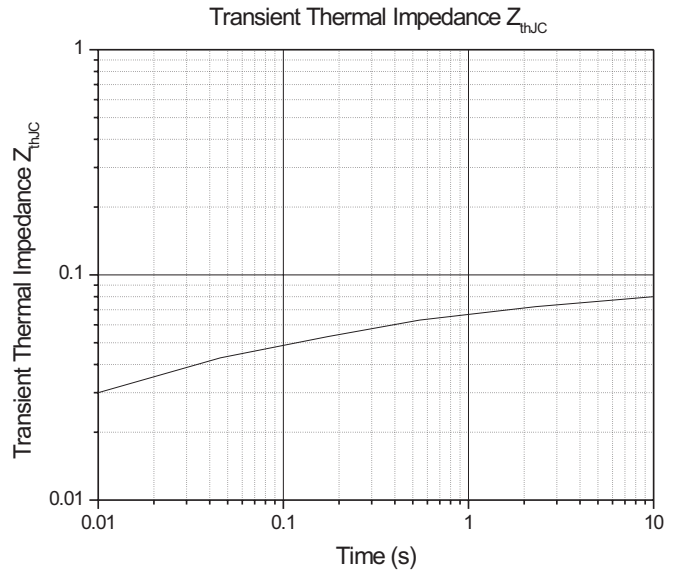


Fig. 5 - Forward Voltage Drop Characteristics

Fig. 6 - Transient Thermal Impedance

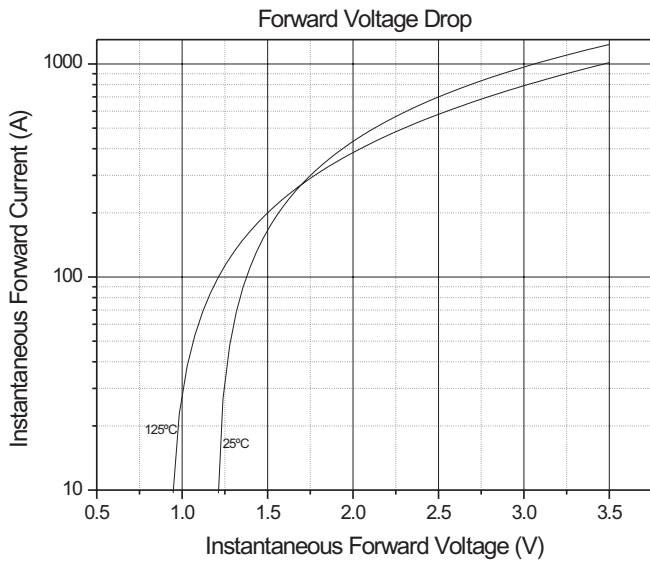

A3L:160TT.XXH

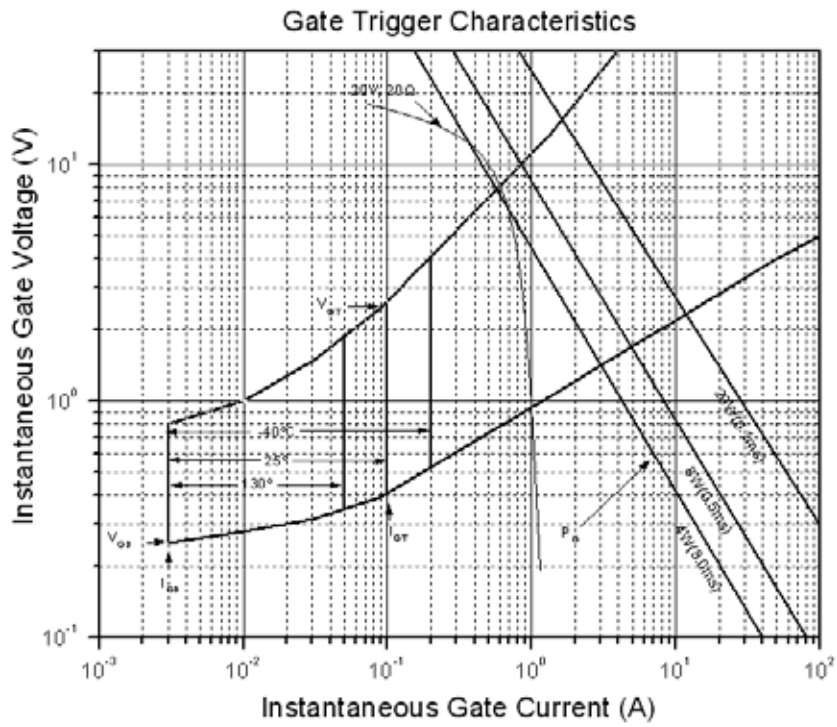


Fig. 7 - Gate Trigger Characteristics

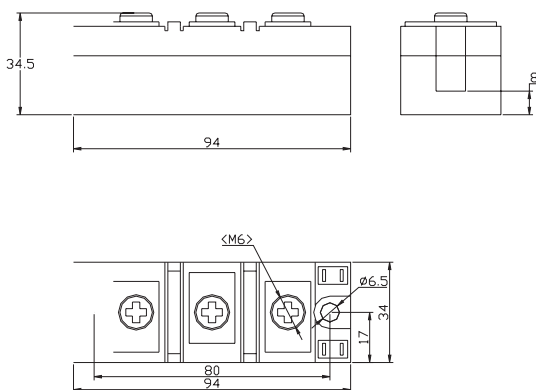


Fig. 8 - Outline Characteristics

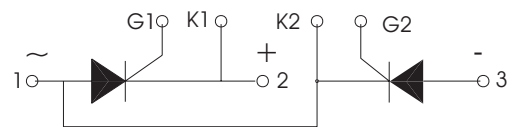


Fig. 9 - Circuit Layout